



Space


Space Plus Audiophile DAC

SABRE SOUND™

HQ. audio 2CH golden
RCA output



Apple remote controll [Optional]

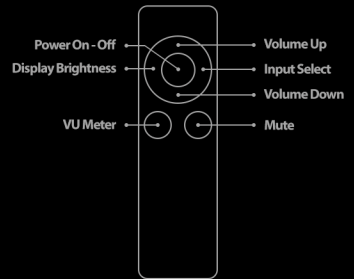

Specifications

- Digital to Analog Converter ESS® SABRE32 SABRE9018Q2C Reference 32-bit HyperStream® D/A chip
- Output Level 49mW into 32Ω, 2Vrms into 600Ω
- Dynamic Range - DNR >121dB
- Total Harmonic Distortion - THD 0,0002%
- Sample Rate - PCM 44,1kHz up to 384kHz
- World Length - PCM 16bit - 20bit - 24bit - 32bit
- Data rate - DSD DSD64, DSD128 - DSD native playback through ASIO driver - DoP v1.1
- S/PDIF Input Coaxial RCA (up to 176,4kHz) - Optical TOSlink (up to 96kHz)
- Data - Power Input USB 2.0 - 5V DC (type B micro USB)
- Power Consumption 180mA
- Dimensions 70 mm x 80 mm x 24 mm
- Other hardware information 0,96" OLED Display (128x64 pixels) - IR receiver - Volume controll (0 to -120dB)
- Operating System support Windows (required driver), macOS, Linux, Android and iOS (OTG cable for mobile devices is required).

RC select

1. After Power ON push and hold [Volume UP],
2. With [Volume Down] select RC type.
3. Push [Volume Up] for exit.

Input select

Push [Volume Up] and [Volume Down] at once to switch to next input.

Display ON/OFF:

After Power ON push and hold [Volume DOWN].

